


Glass door Showcase



FEATURES

- | Adjustable Thermostat
- | Timer Defrost Function
- | 60 mm PU Insulation
- | Heavy Duty Castor
- | Internal & External Light
- | Double Glazed Glass
- | Heated Glass & Frame
- | Danfoss Compressor
- | Fixed Position Door
- | Digital Thermometer
- | Adjustable Shelvings

UNIT: mm

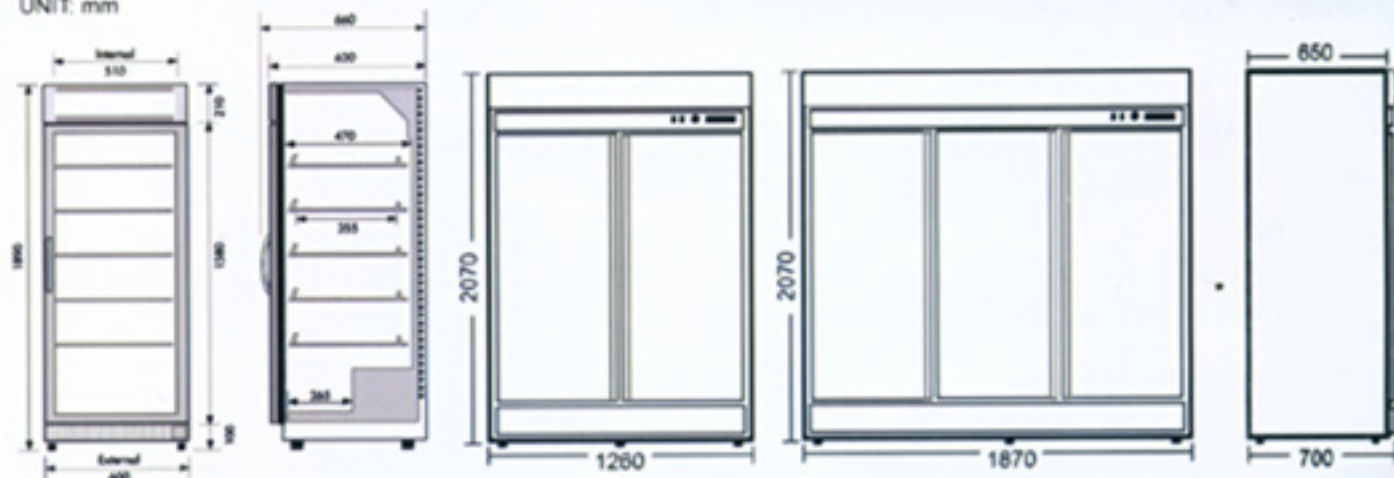

MODEL	DESCRIPTION	REFRIGERANT	VOLUME	TEMPERATURE	POWER CONSUMPTION
RS-C1014C	SINGLE DOOR 5 SHELVES	R134A	407 L	+1°C ~ +4°C	260W
RS-C2003C	TWO DOOR	R134A	840 L	+1°C ~ +4°C	400W
RS-C2003F	10 SHELVES	R404A	840 L	0°C ~ -20°C	800W
RS-C2009C	THREE DOOR	R134A	1270 L	+1°C ~ +4°C	600W
RS-C2009F	15 SHELVES	R404A	1270 L	0°C ~ -20°C	1100W